




Three Phase Hybrid Inverter (HV) (10-50) kW

FROM GRID TO HOME

Three Phase Hybrid Inverter **10-50kW**

Modern farm

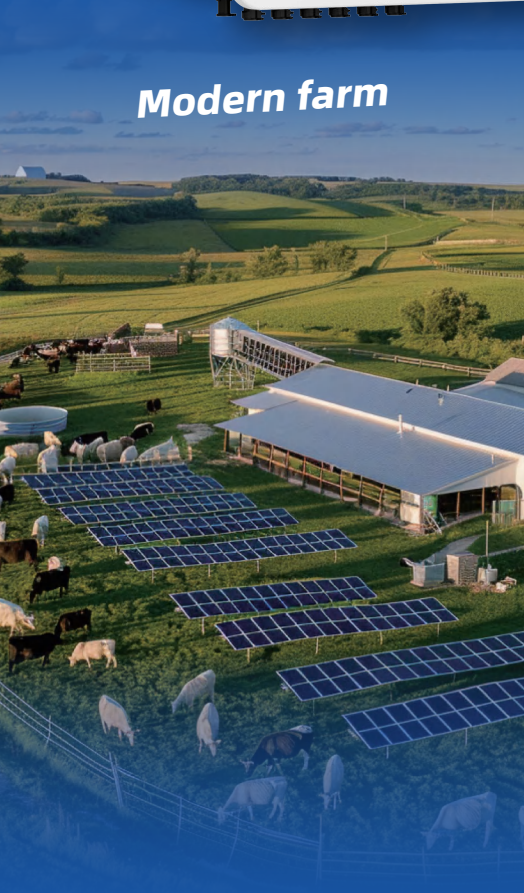

Rural school



Community hospital



More Powerful **200%**

Oversizing PV system

PV input power up to 60kW

More Reliable **55kW**

Max. output power for backup load during On-Grid mode

Supports **30 pcs**

Supports 30 pcs in parallel with Master-Slave control, delivering up to 1500kW

More Flexible **6 PV Strings**

Divide the solar panels into up to six zones

Adapts to complex installation scenarios

More Extensive **100%**

Ensures all the energy supplied is green energy

Support fast Ac chargers and SG-ready heat pumps

More Intelligent **4 ms**

Switching time with whole home backup

100% EPS output power (off grid mode)

Three Phase Hybrid Inverter (HV) (10-20) kW

Type Designation	SiH-10kW-TH-PRO		SiH-15kW-TH	SiH-20kW-TH
PV (input)				
Max. recommended PV array power [Wp]	20000		30000	40000
Max. PV input voltage* [V]			1000	
Rated PV input voltage [V]			650	
Start-up input voltage [V]			150	
MPPT voltage range [V]			150-950	
No. of MPPT/Strings per MPPT	3 (2/1/1)			3 (2/2/1)
Max. PV input current [A]	64 (32/16/16)			80 (32/32/16)
Max. DC short-circuit current [A]	80 (40/20/20)			100 (40/40/20)
Battery (input/output)				
Battery type	LiFePO4 Prismatic Cell			
Battery voltage range [V]	100-800			
Max. charge/discharge current** [A]	50/50			
Max. charge/discharge power [W]	15000/10000		30000/15000	30000/20000
Grid (input/output)				
Max. AC power from grid	43000 W / 43000 VA			
Rated AC output power [VA]	10000		15000	20000
Max. AC output power [VA]	10000		15000	20000
Max. AC output current [A]	15.2		22.8	30.3
Rated voltage [V]	3 / N / PE, 220 / 380; 230 / 400; 240 / 415			
AC voltage range [V]	270-480			
Rated grid frequency [Hz]	50/60			
Grid frequency range [Hz]	45-55 / 55-65			
Total harmonic distortion (THDi, rated power) [%]	<3			
Power factor at rated power / Adjustable power factor	> 0.99 / 0.8 leading to 0.8 lagging			
Backup (output)				
Rated voltage [V]	3 / N / PE, 220 ; 230 ; 240			
Frequency range [Hz]	50 / 60			
Total harmonic distortion (THDv, rated power, Linear load) [%]	≤2			
Backup switching time [ms]	≤4			
Rated output power (off-grid mode) [VA]	10000		15000	20000
Peak output power (off-grid mode)***	16800 W / 168000 VA, 10s		25500 W / 25500 VA, 10s	32000 W / 32000 VA, 10s
Max. output power (on-grid mode)	43000 W / 43000 VA			
Max. output current (on-grid mode) [A]	3*63			
Efficiency				
Max. efficiency/European efficiency [%]	98.00/97.50		98.10/97.60	
Protection & Function				
Parallel****	Master-slave mode			
Surge protection	Type II , DC and AC			
Overvoltage category	II DC and III AC			
Protective class	Class I			
Grid monitoring	Yes			
DC reverse polarity protection	Yes			
Battery input reverse polarity protection	Yes			
Insulation monitoring	Yes			
AC short-circuit protection	Yes			
Residual current protection	Yes			
DC switch (PV)	Yes			
Over-heat protection	Yes			
AFCI	OPT			
General Data				
Topology (PV/battery)	Transformerless			
Degree of protection	IP66			
Dimensions (W*H*D) [mm]	615 * 465 * 255			
Weight [kg]	35		36.5	
Mounting method	Wall-mounting bracket			
Operating ambient temperature range [°C]	-25-60 (Derating above 45)			
Allowable relative humidity range (Non-condensing) [%]	0-100			
Cooling method	Natural convection			
Noise (Typical)	35 dB (A)			
Max. operating altitude [m]	2000			
Display	LED			
Communication	2*RS485/2*CAN/WLAN			
DI/DO	4*DI/2*DO/DRM0			
DC connection type	MC4 (PV, Max. 6 mm²)			
Battery connection type	Plug and play connector (Battery, Max.10mm²)			
AC connection type	OT Terminals (Grid / Backup, Max.26mm²)			

* Input voltage exceeding the MPPT operating voltage range triggers inverter protection

** Depending on the connected battery

*** Can be reached only if PV and battery power is sufficient

**** Detail refer to inverters parallel configuration in User Manual

Three Phase Hybrid Inverter (HV) (25-50) kW

Type Designation	SiH-25kW-TH		SiH-30kW-TH		SiH-40kW-TH		SiH-50kW-TH	
PV (input)								
Max. recommended PV array power [Wp]	50000				60000			
Max. PV input voltage* [V]					1000			
Rated PV input voltage [V]					650			
Start-up input voltage [V]					150			
MPPT voltage range [V]					150-950			
No. of MPPT/Strings per MPPT					3 (2/2/2)			
Max. PV input current [A]					96 (32 / 32 / 32)			
Max. DC short-circuit current [A]					120 (40 / 40 / 40)			
Battery (input/output)								
Battery type	LiFePO4 Prismatic Cell							
Battery voltage range [V]	100-800							
Max. charge/discharge current** [A]			60/60				65/65	
Max. charge/discharge power [W]	30000 / 25000		30000 / 30000		40000 / 40000		50000 / 50000	
Grid (input/output)								
Max. AC power from grid	55000 W / 55000 VA							
Rated AC output power [VA]	25000		30000		40000		50000	
Max. AC output power [VA]	25000		30000		40000		50000	
Max. AC output current [A]	37.9		45.5		60.6		75.8	
Rated voltage [V]	3 / N / PE, 220 / 380; 230 / 400; 240 / 415							
AC voltage range [V]	270-480							
Rated grid frequency [Hz]	50/60							
Grid frequency range [Hz]	45-55 / 55-65							
Total harmonic distortion (THDi, rated power) [%]	<3							
Power factor at rated power / Adjustable power factor	> 0.99 / 0.8 leading to 0.8 lagging							
Backup (output)								
Rated voltage [V]	3 / N / PE, 220 ; 230 ; 240							
Frequency range [Hz]	50 / 60							
Total harmonic distortion (THDv, rated power, Linear load) [%]	≤2							
Backup switching time [ms]	≤4							
Rated output power (off-grid mode) [VA]	25000		30000		40000		50000	
Peak output power (off-grid mode)***	36500 W / 36500 VA, 10s		45000 W / 45000 VA, 10s		60000 W / 60000 VA, 10s		70000 W / 70000 VA, 10s	
Max. output power (on-grid mode)	55000 W / 55000 VA							
Max. output current (on-grid mode) [A]	3*80							
Efficiency								
Max. efficiency/European efficiency [%]	98.20 / 97.80				98.20 / 97.90			
Protection & Function								
Parallel****	Master-slave mode							
Surge protection	Type II , DC and AC							
Overvoltage category	II DC and III AC							
Protective class	Class I							
Grid monitoring	Yes							
DC reverse polarity protection	Yes							
Battery input reverse polarity protection	Yes							
Insulation monitoring	Yes							
AC short-circuit protection	Yes							
Residual current protection	Yes							
DC switch (PV)	Yes							
Over-heat protection	Yes							
AFCI	OPT							
General Data								
Topology (PV/battery)	Transformerless							
Degree of protection	IP66							
Dimensions (W*H*D) [mm]	615 * 465 * 255							
Weight [kg]	38				39.5		39.8	
Mounting method	Wall-mounting bracket							
Operating ambient temperature range [°C]	-25-60 (Derating above 45)							
Allowable relative humidity range (Non-condensing) [%]	0-100							
Cooling method	Fan cooling							
Noise (Typical)	55 dB (A)				60 dB (A)			
Max. operating altitude [m]	2000							
Display	LED							
Communication	2*RS485/2*CAN/WLAN							
DI/DO	4*DI/2*DO/DRM0							
DC connection type	MC4 (PV, Max. 6 mm²)							
Battery connection type	Plug and play connector (Battery, Max.10mm²)							
AC connection type	OT Terminals (Grid / Backup, Max.26mm²)							

* Input voltage exceeding the MPPT operating voltage range triggers inverter protection

** Depending on the connected battery

*** Can be reached only if PV and battery power is sufficient

**** Detail refer to inverters parallel configuration in User Manual

FROM GRID TO HOME

Full Range From Power Generation, Transmission, Distribution To

Energy Storage

33 years

With 33 years of experience, specialized in equipment manufacturing and engineering services

Public Co.

Founded in 1993
Stock listed in 2004 (SZSE002028)

US\$5.0 Billion

2025 Turnover

TOP 3

Sieyuan 思源电气
Electrical Equip. Manufacturer

1,000kV

Full range product: 10kV - 1,000kV

100+

With 10,000+ employees in 100+ countries and regions

22

22 Manufacturing bases



C&I and Residential BESS



esGrid


Grid-level energy storage

Sieyuan Utility Scale BESS





Global Marketing & Service Layout

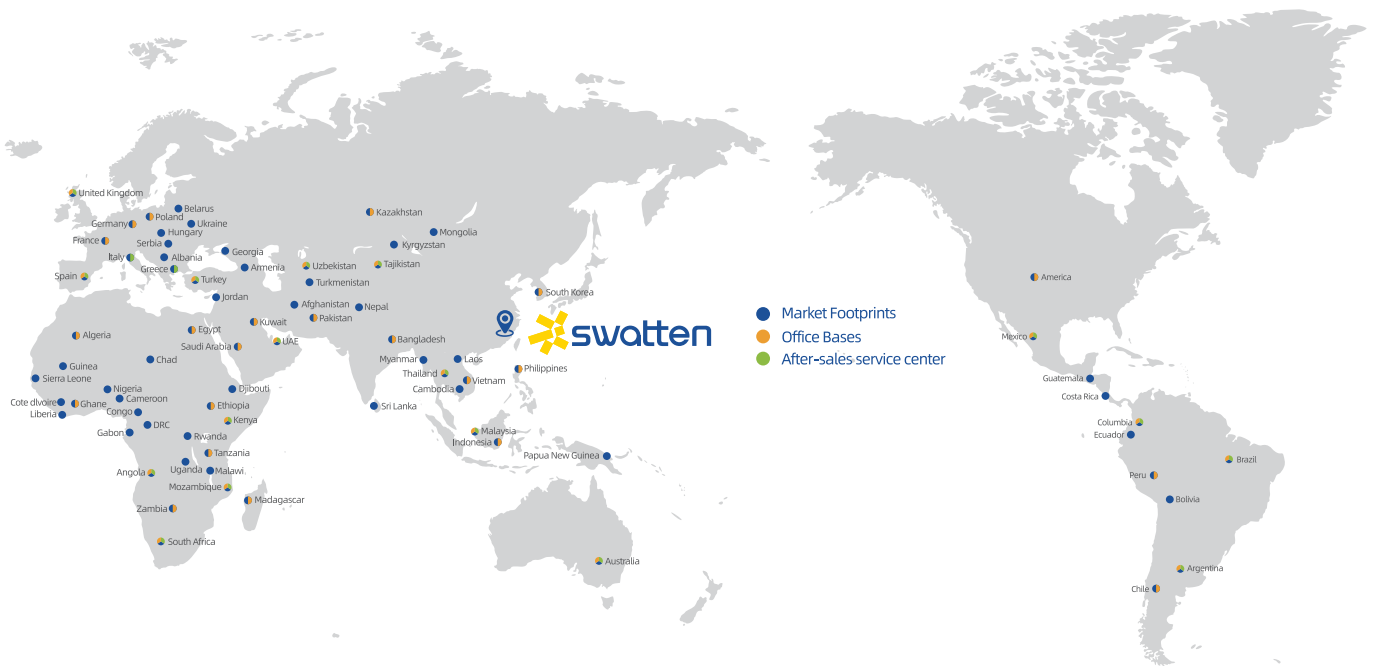

Our Global Clients





Swatten's Global Cases



Facebook




Linkedin



YouTube



Instagram



Rednote

FOLLOW
US!

